

Liquid-cooling Energy Storage Cabinet Solutions

• Product Features and Advantages

Providing products as OEM/ODM


- **High Security**

Battery circuit safety management, fast fuse protection.
A multi-level battery protection system ensuring impeccable safety.
Intelligent anti-leakage detection,enhancing system safety.
- **Long Lifespan**

Intelligent liquid cooling ensures higher efficiency and longer battery cycle life.
Modular design with parallel support for easy system expansion.
- **High Integration**

Highly integrated, easy to transport and operation and maintenance.
Fully pre-assembled, eliminating the need for on-site battery module installation.
On-site installation within 8 hours.
- **Intelligent**

Real-time status monitoring and fault recording to achieve fault warning and fault location.
Built-in battery performance monitoring and recording function.

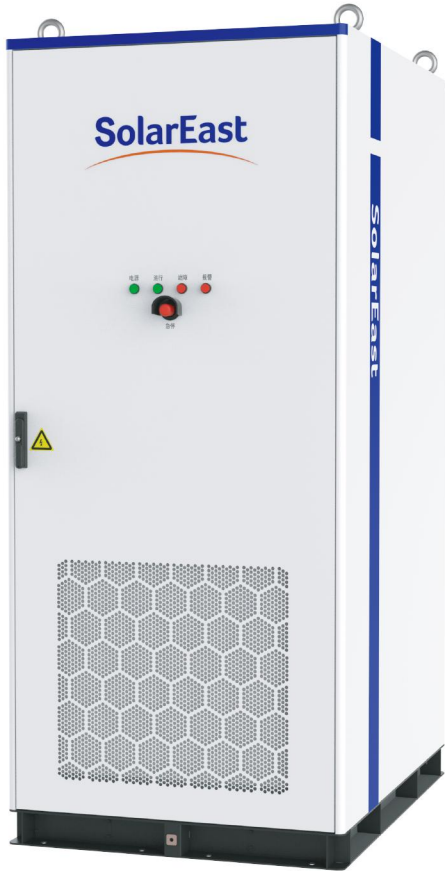

Model	SE215L-100K	SE233L-125K	SE241L-125K	SE261L-125K
AC Side				
AC Rated Power	100kW	125kW	125kW	125kW
Allowable Grid Voltage Range	400V (-15%~10%)			
Allowable Grid Frequency Range	50/60Hz±2.5Hz			
Rated Current	145A	180A	180A	180A
Max. PCS Efficiency	98%			
Way of Connection	3P+N+PE			
Battery Side				
Cell Specification	LFP 3.2V/280Ah	LFP 3.2V/280Ah	LFP 3.2V/314Ah	LFP 3.2V/314Ah
Battery RACK Configuration	1P240S	1P260S	1P240S	1P260S
System Capacity	215kWh @ 25°C, 0.5P	233kWh @ 25°C, 0.5P	241kWh @ 25°C, 0.5P	261kWh @ 25°C, 0.5P
Voltage Range	648~864V	702~936V	648~864V	702~936V
System Parameter				
Charge/discharge Ratio	≤0.5P			
Display	Touch screen display (optional)			
Dimension(W*D*H)	1000*1350*2391mm(Incl. lifting lug) 1000*1350*2300mm(Excl. liftinglug)			
Weight	2400kg	2600kg	2450kg	2650kg
Noise	<75dB			
IP rating	IP54 (Pack: IP67)			
System Efficiency	>88%			
Cooling method	Liquid cooling			
Environmental Temperature	-30~55 °C			
Humidity	≤95%			
Maximum working altitude	2000m			
Fire safety configuration	Aerosol			
Communication Interface	Ethernet/CAN/RS485			
Communication Protocol	MODBUS-TCP			
Compliant with standards	GB/T 34120, GB/T 36276, IEC62477, IEC62619, IEC63056			
Cycle Life	8000			



CE UN38.3

IEC61000 IEC62477
IEC62619 IEC63056

This product sheet is as comprehensive and detailed as possible based on existing information.
The company reserves the right to modify data, parameters and other information.

Liquid-cooling Energy Storage Cabinet Solutions

• Product Features and Advantages

Providing products as OEM/ODM

- **High Security**

Battery circuit safety management, fast fuse protection.
A multi-level battery protection system ensuring impeccable safety.
Intelligent anti-leakage detection,enhancing system safety.
- **Long Lifespan**

Intelligent liquid cooling ensures higher efficiency and longer battery cycle life.
Modular design with parallel support for easy system expansion.
- **High Integration**

Highly integrated, easy to transport and operation and maintenance.
Fully pre-assembled, eliminating the need for on-site battery module installation.
On-site installation within 8 hours.
- **Intelligent**

Real-time status monitoring and fault recording to achieve fault warning and fault location.
Built-in battery performance monitoring and recording function.



Model	SE372L-186K	SE418L-215K
	AC Side	
AC Rated Power	186kW	215kW
Allowable Grid Voltage Range	400V (-15%~10%)	
Allowable Grid Frequency Range	50/60Hz±2.5Hz	
Rated Current	268A	310A
Max. PCS Efficiency	98%	
Way of Connection	3P+PE	
	Battery Side	
Cell Specification	LFP 3.2V/280Ah	LFP 3.2V/314Ah
Battery RACK Configuration	1P416S	1P416S
System Capacity	372.736kWh @ 25°C, 0.5P	417.996kWh @ 25°C, 0.5P
Voltage Range	1123.2~1497.6V	
	System Parameter	
Charge/discharge Ratio	≤0.5P	
Display	Touch screen display (optional)	
Dimension(W*D*H)	1400*1400*2400mm	
Weight	3600kg	3700kg
Noise	<75dB	
IP rating	IP54 (Pack: IP67)	
System Efficiency	>88%	
Cooling method	Liquid cooling	
Environmental Temperature	-30~55 °C	
Humidity	≤95%	
Maximum working altitude	2000m	
Fire safety configuration	Aerosol	
Communication Interface	Ethernet/CAN/RS485	
Communication Protocol	MODBUS-RTU	
Compliant with standards	GB/T 34120, GB/T 36276, IEC62477, IEC62619, IEC63056	
Cycle Life	8000	

TUV NORD

TYPE TESTED

CE

UN38.3

IEC61000

IEC62477

IEC62619

IEC63056

This product sheet is as comprehensive and detailed as possible based on existing information.
The company reserves the right to modify data, parameters and other information.